





# Technical Data Sheet

## Bespoke moulded tee-piece

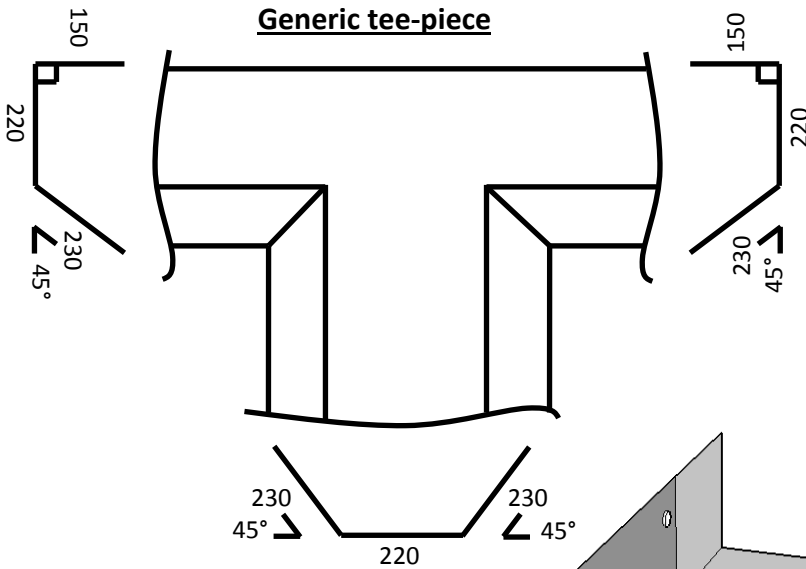

Liner pinned and fixed before hot air welding of the tee-piece

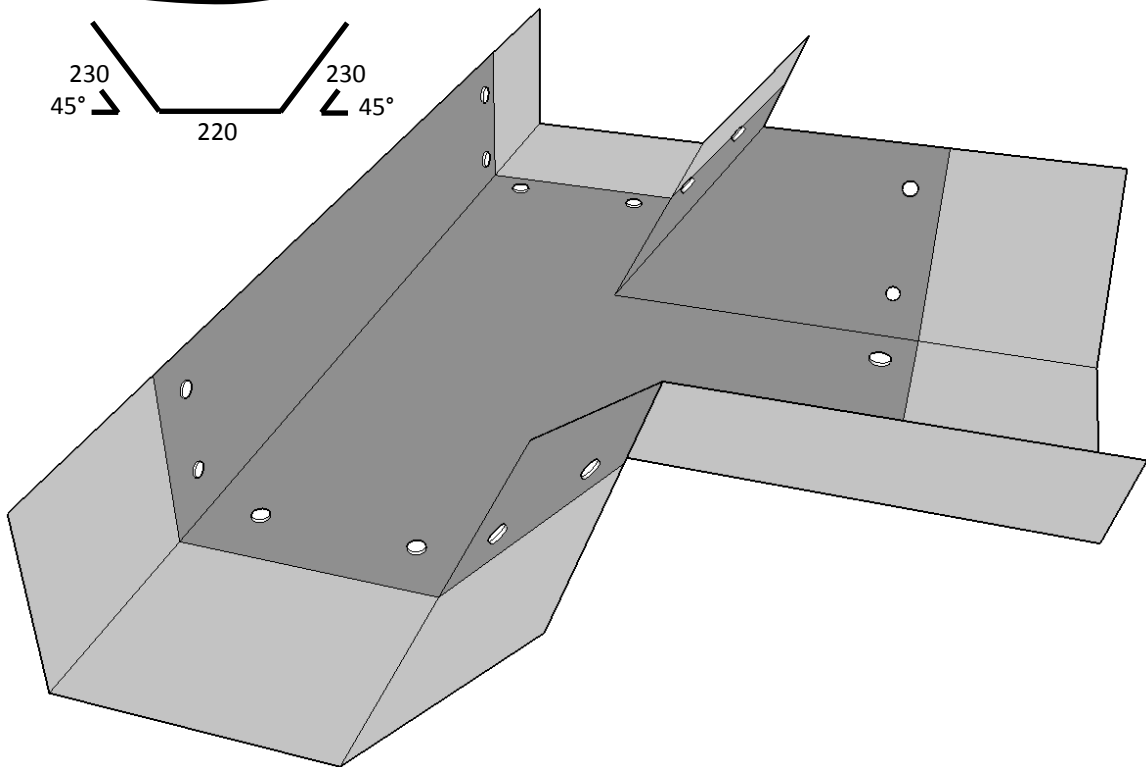


### Fixings specification engineered for gutter substrate type

Substrate	Product code	Pilot hole (if required)	Drill speed
STEEL < 3mm	HDS-LS-30	N/A	0-2000rpm – Can be full speed
STEEL > 3mm	HDS-HS-48	N/A	0-2000rpm – Can be full speed
CONCRETE	HDS-CON-45	5.2mm Diameter	0-950rpm – Typically 750Watt
ASBESTOS	HDS-ASB-38	9.5mm Diameter	Set to lowest speed

When drilling holes in asbestos cement (AC) and other highly bonded materials. Please refer to the health & safety A9 guide.

<b>Item description: Bespoke moulded tee-piece</b>	
<b>Item/Job</b>	<b>Item reference: MWTP</b>
Company/Customer name:	
Job reference:	
Customer order number:	Quantity:

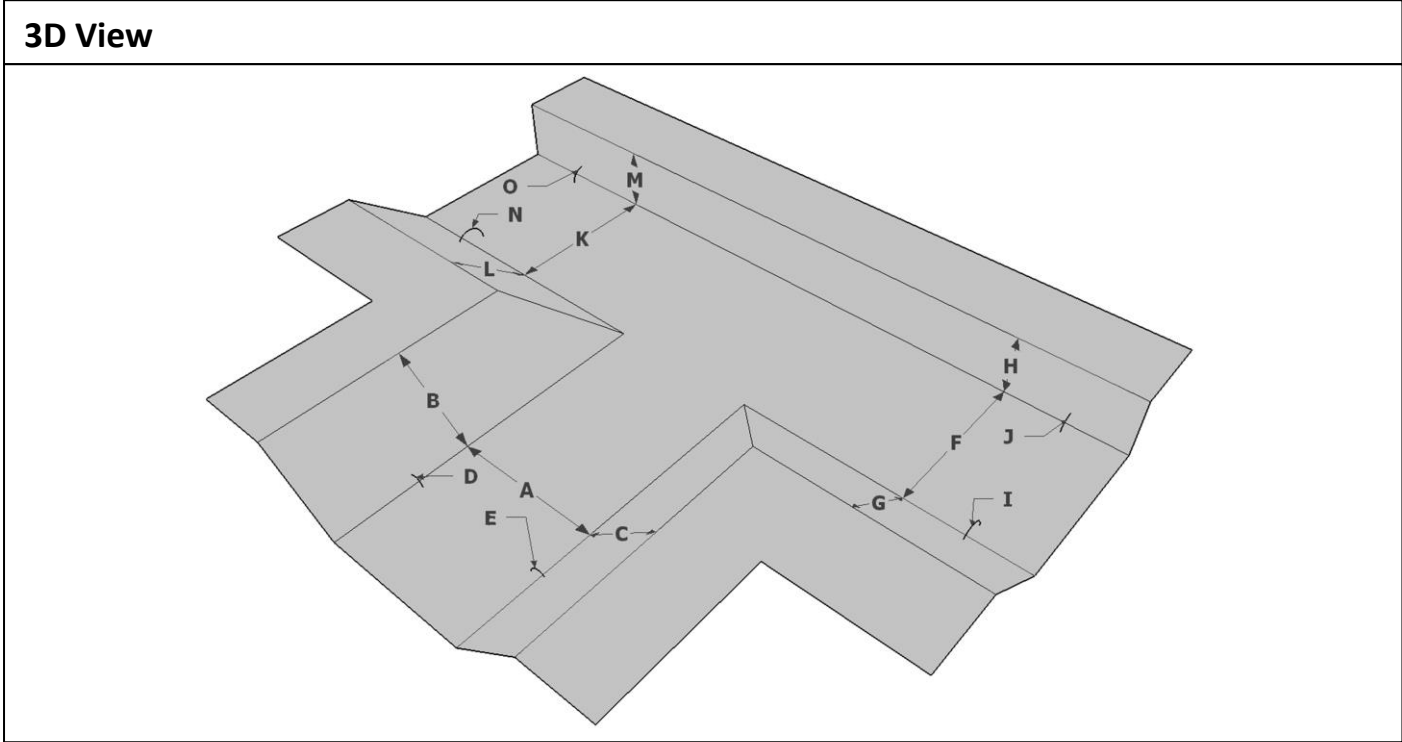

Where items are flanged, these flanges are manufactured to company standard sizes. Other sizes are available upon request.

**Dimensions**

A = mm	F = mm	K = mm
B = mm	G = mm	L = mm
C = mm	H = mm	M = mm
D = ° Angle	I = ° Angle	N = ° Angle
E = ° Angle	J = ° Angle	O = ° Angle

**Office use**

Order number	Page	of
Made by	Date	

HD Sharman Ltd.  
 High Peak Works  
 Chapel-en-le-Frith  
 High Peak, Derbyshire  
 SK23 0HW

T. 01298 812371  
 F. 01298 812237  
 E. info@hdsharman.co.uk  
 W. hdsharman.co.uk

