



BIG YELLOW CASE STUDY

Discover how Big Yellow Storage implemented solar PV systems.

As part of its environmental, social and governance responsibility, Big Yellow Storage undertook a project to install solar PV panels on the roofs of its properties.

Prior to installation, each roof underwent refurbishment with the help of EvoEnergy, Hollis Global, Welbro and Sharmans.



[LEARN MORE](#)

GAZ'S GUTTER TALK

USE OF THE LEISTER TRIAC AT 120v HOT AIR WELDING KIT

Follow these guidelines to ensure a successful weld on our Plygene gutter lining system.



- Both surfaces should be dry and clean from any contaminants
- Both surfaces being welded should be compatible with each other
- The hot air gun needs to provide consistent airflow that is of low pressure and high volume
- Using a temperature controlling device to control the temperature of the weld accurately. The TRIAC AT has a digital display showing the current gun temperature
- The gun must provide clean dry air which is free of oil and moisture.

Hot air guns must be capable of safely supplying air at a range between 350-500°C, depending on environmental conditions at the point of the weld. If a consistent temperature cannot be maintained, the weld will fail and only come to light when a customer reports water ingress issues to the contractor.

[CONTACT US](#)

THE MARKET LEADING CUT EDGE CORROSION TREATMENT: SEAMSIL 100




Delcote now replaces the Seamsil 100 topcoat with these benefits:

- Cost savings of up to 5% per linear metre compared to the previous system
- Fewer tins are needed and less labour intensive as it can be brush or roller applied
- No thinners required for the Delcote topcoat, making it less temperature dependant
- Faster curing
- Higher solids content resulting in lower VOCs
- A wide range of colour options from the full Delcote system

[FIND OUT MORE](#)

ANTI-SLIP DELCOTE:

Sharmans sell an anti-slip aggregate to add to your Delcote system to make it safe to walk on.

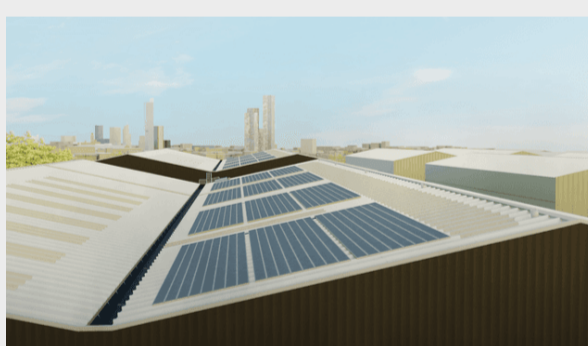

To ensure the successful application of the aggregate, we recommend the application of a second coat of Delcote as part of our 10 year system, which is at least 1 metre wide. Similarly, for our 25 year system, apply a third coat of Delcote topcoat. This will help to guarantee the effectiveness and longevity of the coating system.


- The aggregate can be cast onto the 1 metre wide surface of wet Delcote straight after application.
- 1 bag of 25 kg will cover 100 linear metres at 1 metre wide.
- Each bag costs £82.70. The standard colour is brown, with additional colours on request.

[CONTACT US TO ORDER](#)

PLYGENE SURVEYS:

On select Plygene projects, our Technical Service Managers will visit the site to inspect and assess the roof's condition. They will take comprehensive measurements which will be used to design a solution that meets the exact specification required.

Our team is available to support you throughout the project and handle any complex gutter requirements ensuring a tailored solution to meet your requirements. They will also ensure that the appropriate fixings are included in the delivery.

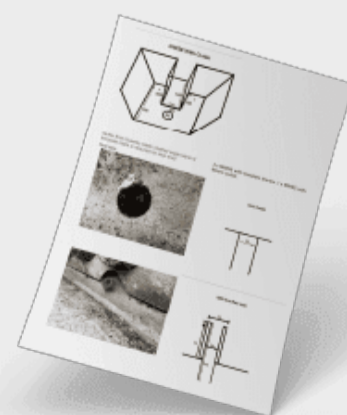

[CONTACT US TO FIND OUT MORE](#)